



ATU

Automatic Coolant Top Up Unit

- Automatically maintains correct fluid level
- Fail safe valve
- Self-monitoring
- Universal installation
- Low maintenance

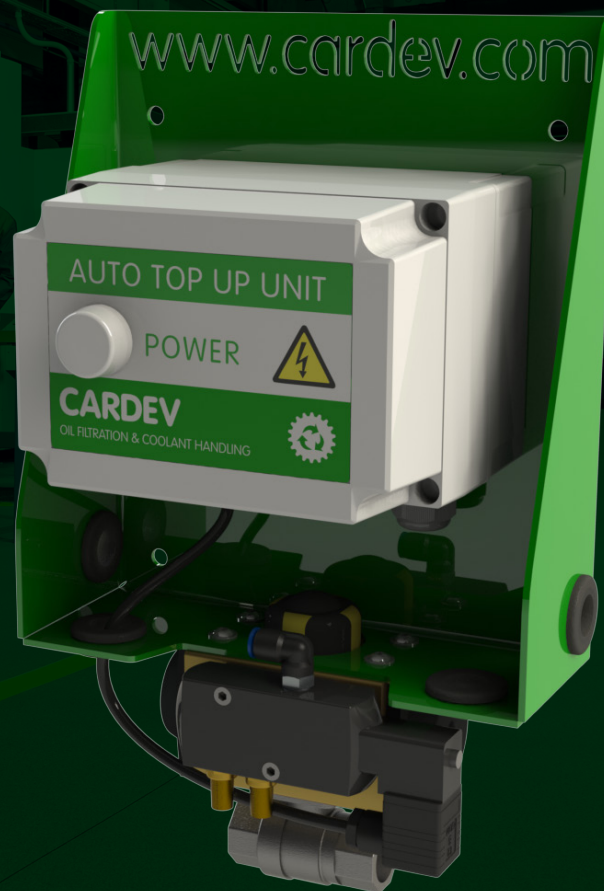


Results


- Reduced machine downtime
- Reduced coolant consumption
- Health and Safety benefits – no manual top up
- Increased productivity and profitability

Features

- Delivers maximum benefit when used in conjunction with CARDEV coolant mixing equipment
- Unattended operation
- Flexible installation to suit any machine
- Compact design

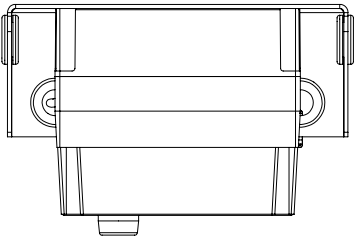

258mm

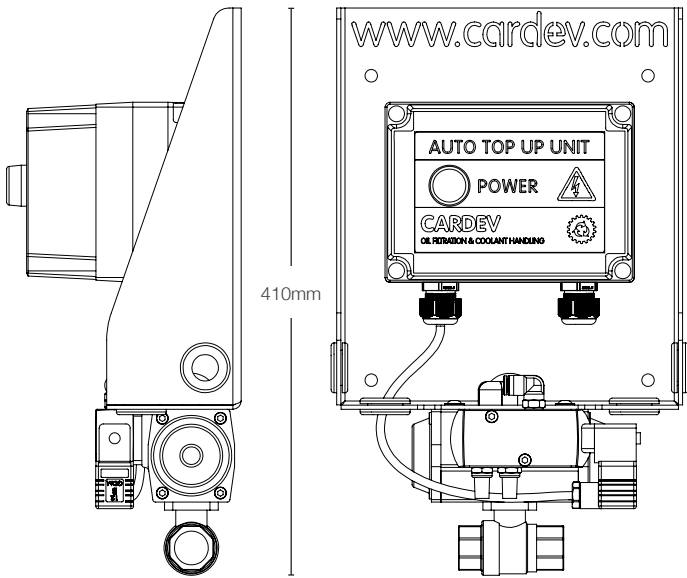

410mm

170mm

Recommended Installation	Services required	Dimensions (mm)			Connections	
		H	W	L	Inlet	Outlet
Permanent installation to coolant sump via customer pipework system.	220V single phase supply within 2m. Compressed air regulated at 5-7 Bar	410	258	170	3/4" BSP (f)	3/4" BSP (f)



ETL Fluid Experts Ltd
Environmental Technologies Group Grimbald Crag Road Knaresborough North Yorkshire HG5 8PY United Kingdom
T +44 (0)1423 522911 F +44 (0)1423 530043 E sales@etlfe.com

www.etlfluidexperts.com

The specification and photography is for reference only and may be subject to change.
ETL Fluid Experts Ltd is part of the Environmental Technologies Group Ltd. All rights reserved.